





Model **701E** Set-up Instructions

Update: 11-24-2016




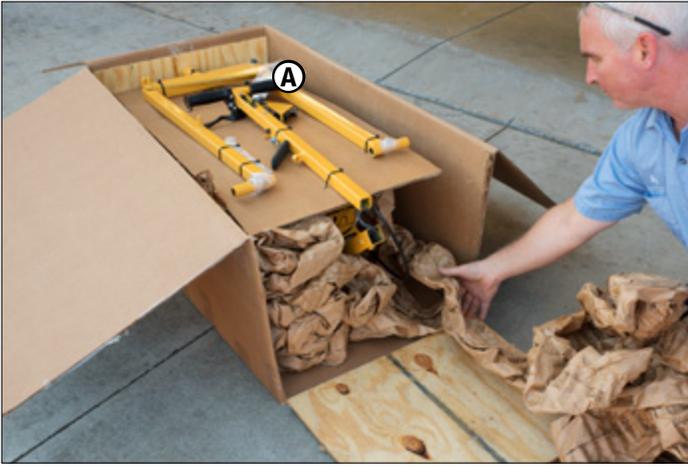


1. Carefully open box. Cut off end of box away from black handle grips **A**. Leave the unit in the box at this time but remove loose packaging material.

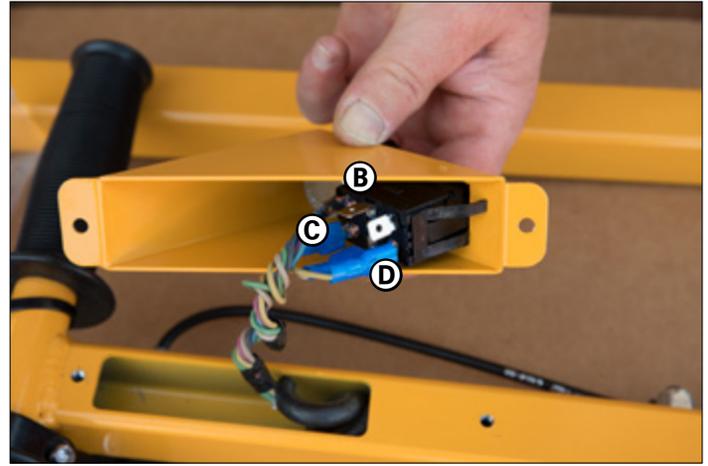

2. Inspect wire connectors **B C D** to make sure they are seated properly.

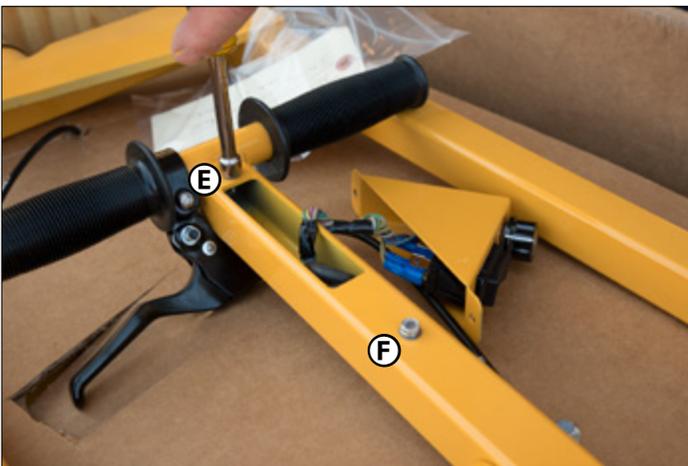


3. Remove the two 5/16" bolts **E F** that were installed at the factory.

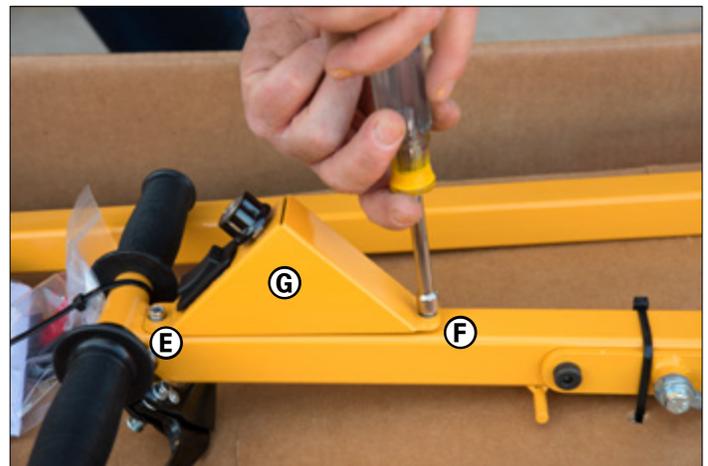

4. Reinstall the 5/16" bolts to secure control box **G** with controls facing handles. Make sure all wires are inserted inside the handle bar so no wires are sticking out to cause damage. Tighten firmly but do not over torque bolts.




5. Remove ties holding the handle bar to the cardboard.

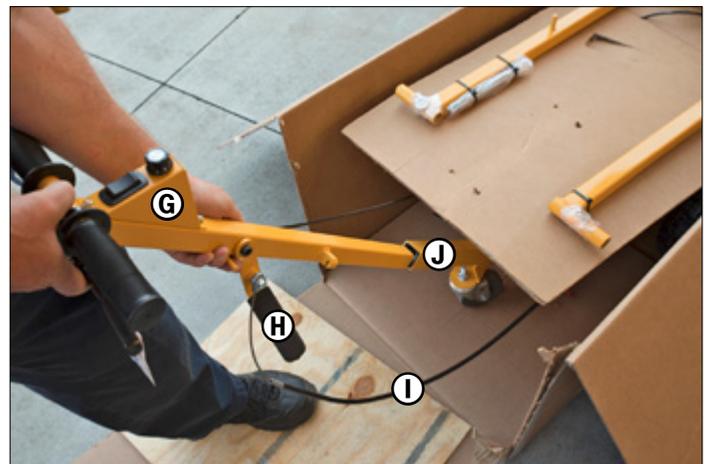


6. Rotate handlebar so the clamp lever handle **H** is on the right side and controls **G** are facing up. Make sure cable **I** is not twisted and that it makes a downward loop. Insert handle into the receiver on the tug **J**.




7. Remove plastic package and contents, 2 handles **K** and a Technical Manual CD. Screw the threaded ends of the handles into the handle bar receiver **J**. One will go on the left side and one on the bottom of the bar. (See **8**)

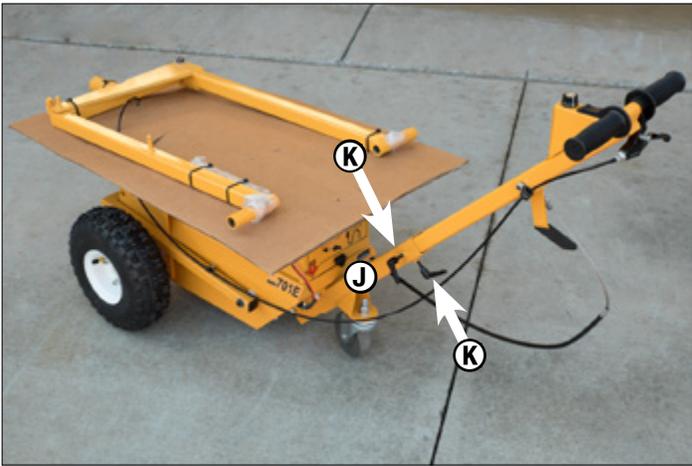


8. Remove tug from box. When installed properly, the two handles (from **7**) will look like the image above.

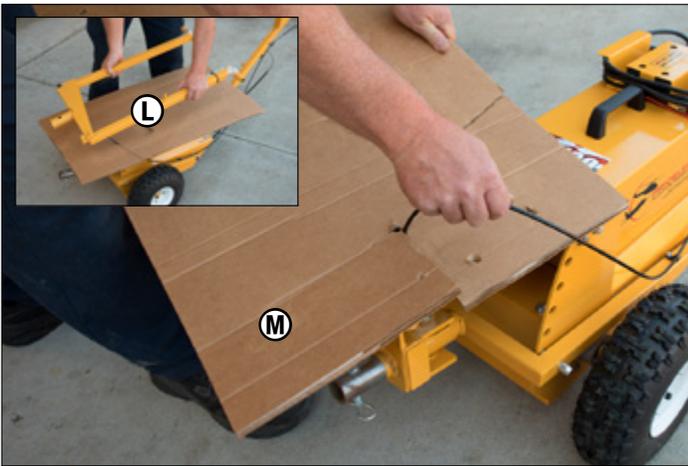

9. Remove the jaw assembly **L** and set to the side.
WARNING: Jaw assembly can open and close causing a pinch hazard.
 Carefully remove remaining cardboard **M**

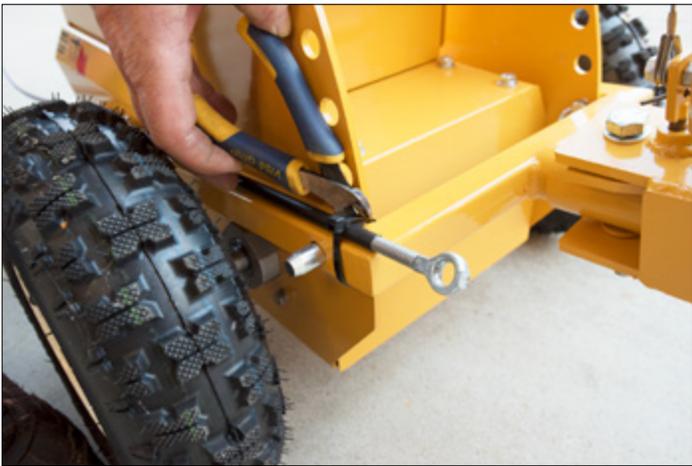


10. Remove tie holding cable.

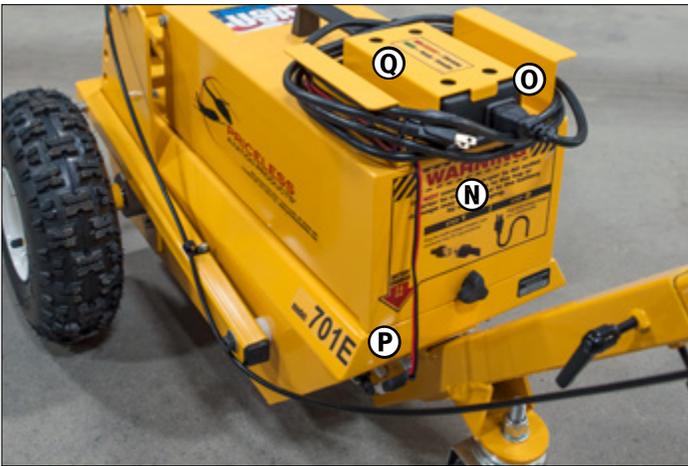

11. Follow the important instructions on the "**WARNING**" label **N** for power connections **O** and **P**. label **O** on top of the unit explains the condition of the batteries charge.




12. Install the jaw assembly.
WARNING: Jaw assembly can open and close causing a pinch hazard.

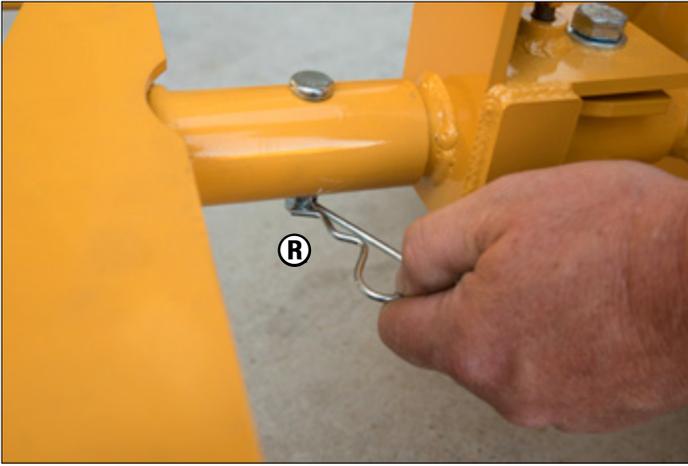


13. Install Clevis Pin **R**.




14. Fit cable into anchor block **S**.

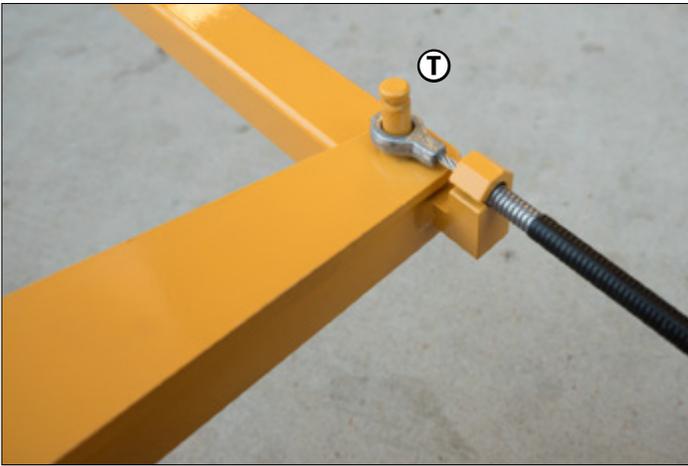

15. Install cable clip onto jaw assembly pin **T**.

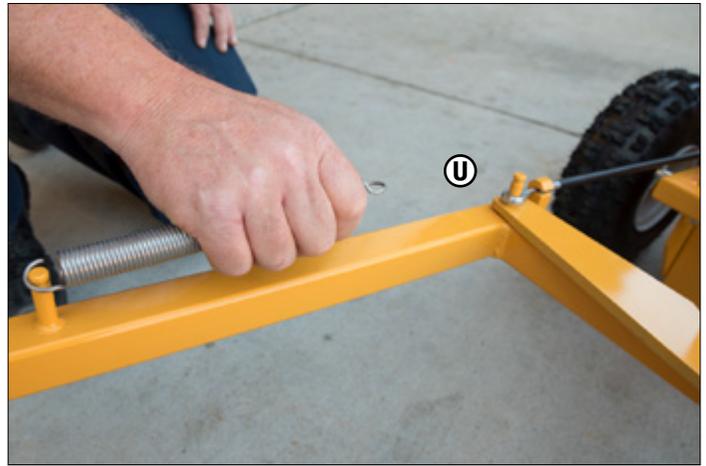

16. Attach spring to groove on jaw assembly pin **U**.

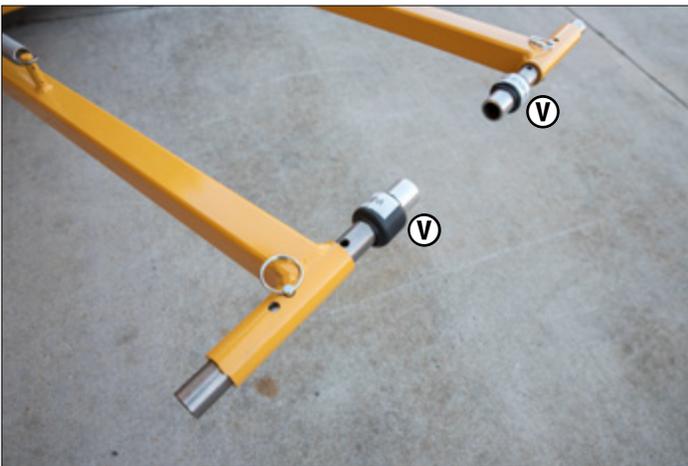

17. Install aircraft adapters into the jaw ends and secure with hitch pins **V**.



18. Make sure the 701E's battery is fully charged before using.